


NOTES:  
 1.0 DISCONNECT OEM DASH AIR CLUTCH WIRE WHEN WIRING A/C SYSTEM (UNLESS WIRING MAX SYSTEM)  
 2.0 DO NOT INSTALL A/C ELECTRICAL PANEL IN AN AREA THAT IS NOT VENTILATED OR CAN EXCEED 150° F. OR 66° C.  
 3.0 DIODES REQUIRED FOR TIE-IN APPLICATIONS.




BATTERY FUSE NOTE:  
 FUSE (100 AMP) MUST BE MOUNTED WITHIN 12" OF THE SOURCE. FUSE MCC PART NO. 22-02336-31 AND HOLDER 22-01800-00 SHOULD BE HOOKED UP WITH RED 4 GAUGE SGX WIRE MCC P/N 22-62241.

PANEL ASSY #Y25-00012-00

Change to 60A MIDI fuse when adding a slave evap to same panel.

When attaching slave evap to same panel as existing evap only High/Med/Low wires are used and attached as follows: ORANGE-Pin2 YELLOW-Pin4 RED-Pin6


High Pressure Switch

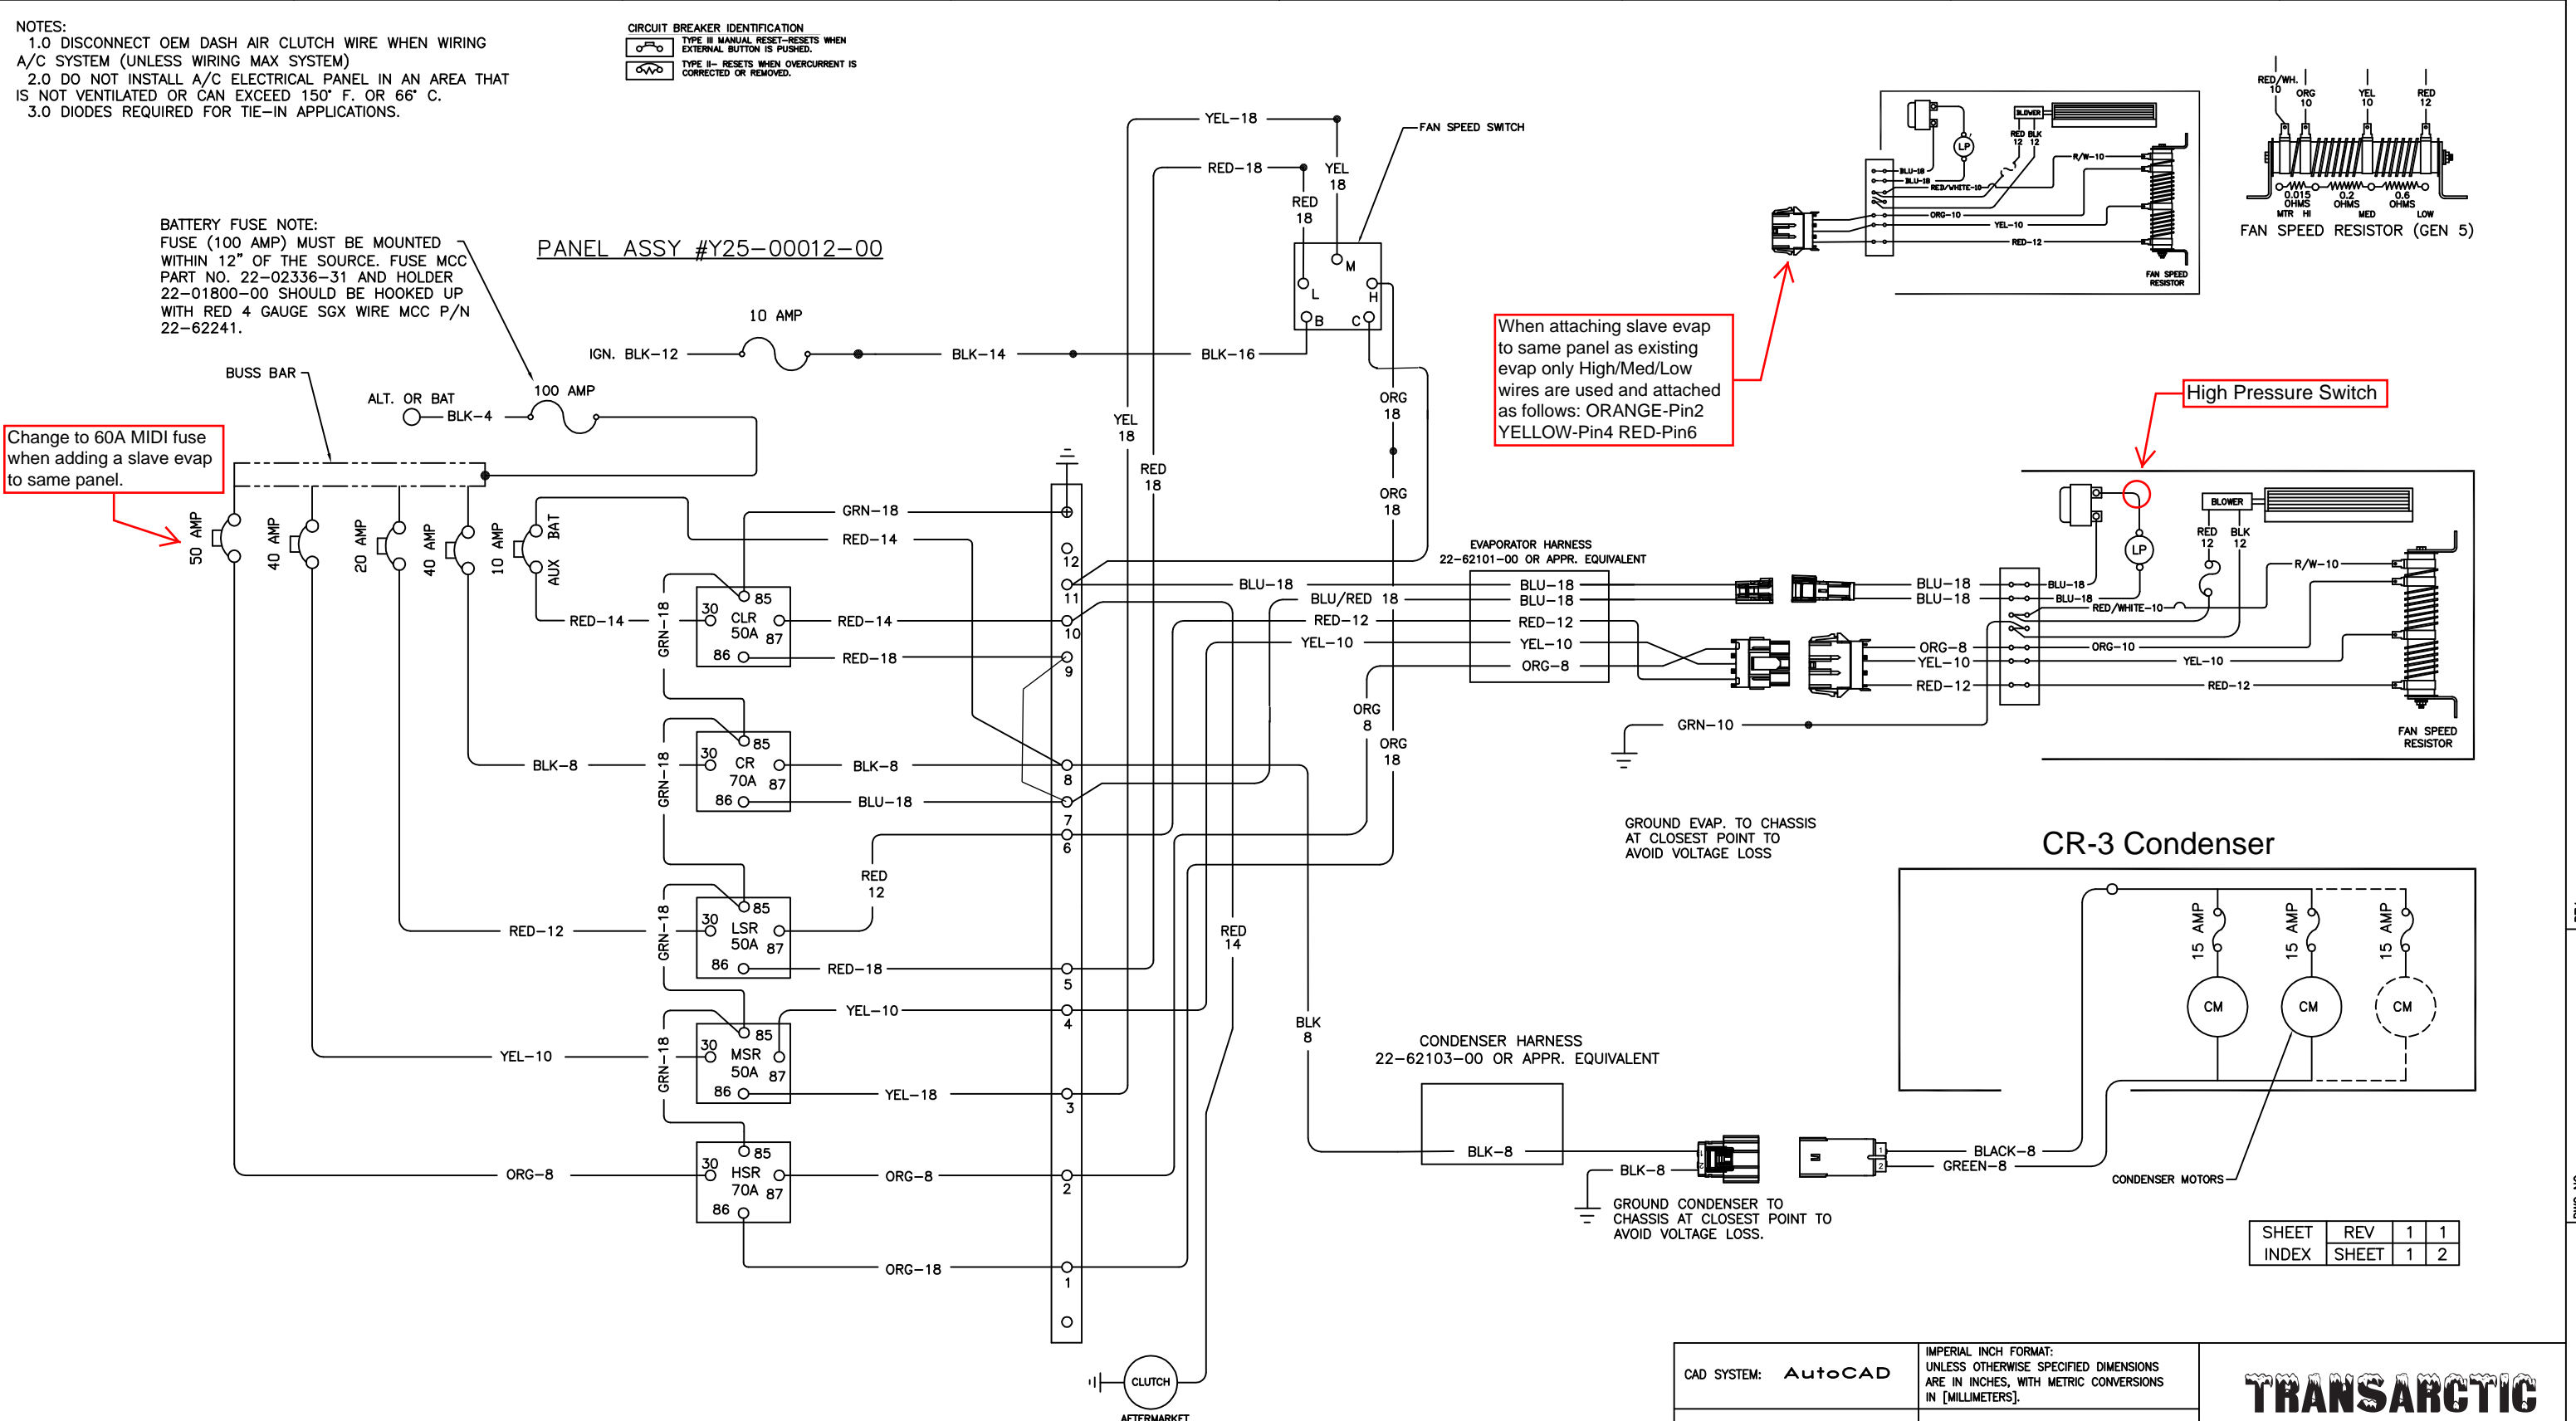

SHEET	REV	1	1
INDEX	SHEET	1	2

1	INITIAL RELEASE	8 MAY 14	KLH						
SYM	REVISION RECORD	DATE	BY	ENGR.	M.E.	NPCA NO.	WEIGHT	MFG/PURCH	MFG

CAD SYSTEM: AutoCAD



MATERIAL

IMPERIAL INCH FORMAT:  
 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES, WITH METRIC CONVERSIONS IN [MILLIMETERS].

UNLESS OTHERWISE SPECIFIED TOLERANCES ON:  
 .00 DEC .000 DEC DEC ANG  
 ± .04 ± .020 ± ± 2°  
 [.0] DEC [.00] DEC DEC  
 ±[1.0] ±[.50] ± [ ]

SURFACES	HOLE DIA	HOLE SPACING	HOLE LOC
✓ AA	± .005 ± [.13]	± .015 ± [.38]	± .03 ± [.8]

NON-CUMULATIVE

DIMENSIONS IN (PARENTHESIS) ARE FOR INFORMATION ONLY. TOLERANCES DO NOT APPLY.

**TRANSARCTIC**

TITLE  
 WIRE DIAGRAM  
 ACT (2)EV-2 (2)CR-3

SIZE D DRAWING NO. KH13 REV 1

NEXT DRAWING NONE SCALE 1:2