

Bill of Materials Listing

TransArctic Canada Inc.

12/22/2016

Page 1 of 1

Product Number		Description	Bin	Date	Weight	Uof M	Yield
Line	Component Prod#	Description		Unit	Qty		
KMC96694		Mt Kit, ISL, HDX, TM-55/65,24V,'16		8/10/2016	111.17		0
10	BEL32388	Belt, Banded B gr, 2388mm (94")		each	1		
20	BMC83123	Bkt, Main, Idler, Weldm't, ISL, HDX, '13		each	1		
30	BMC83125	Bkt, Weldm't, Adapter Pl, ISL, HDX, '13		each	1		
40	BMC83129	Bkt, Weldm't, Main Base, ISL, HDX, '13		each	1		
50	KCB65501	Kit, Compressor, P/S, Alt, TM-65/55, '16		each	1		
60	KPC89022	Kit, Pulley, ISL, 8.9L, 2B/X,'13		each	1		
65	PUA05012	Pulley, Assy, Idler,B/BX gr,5", STL,Plt		each	1		
70	PUL80074	Pulley, Idler, B/S, Wide, 76d (89102)		each	1		
80	SCD21912	Spacer, Col, Drl,21.9mm x 25.4o x 12.3i		each	1		
85	SCD25412	Spacer, Col, Drl,25.4mm x 25.4o x 12.3i		each	1		
90	SLV17012	Sleeve, Pulley, 16.9o x 22.23mm x 12.32i		each	2		
100	KBC96694	Bag Kit, Fasteners, KMC96694		each	1		

Bill of Materials Listing

TransArctic Canada Inc.

8/11/2016
Page 1 of 1

Product Number		Description	Bin	Date	Weight	Uof M	Yield
Line	Component Prod#	Description		Unit	Qty		
KBC96694		Bag Kit, Fasteners, KMC96694		8/10/2016	2.12		0
10	BTC10035	Bolt, Hex, 10 x 1.5 x 35mm, 10.9, Plt,FT		each	3		
20	BTC12080	Bolt, Hex, 12 x 1.75 x 80mm, 10.9,Plt,FT		each	2		
30	BTQ06125	Bolt, Hex, 3/8-16unc, 1.25", 8, Plt		each	5		
40	BTQ08125	Bolt, Hex, 1/2-13unc, 1.25", 8, Plt		each	2		
50	BTQ08151	Bolt, Hex, 1/2-20unf, 1.5", 8, Plt		each	2		
60	CSF08101	Capscrew, FH, 1/2-20unf x 1.0",Alloy,Plt		each	4		
70	NTA10000	Nut, Hex, 10 x 1.5, 8.8, Plt		each	3		
80	NTA12000	Nut, Hex, 12 x 1.75, 8.8, Plt		each	2		
90	NTQ06000	Nut, Hex, 3/8-16unc, 8, Plt		each	5		
100	WFA10000	Washer, Flat, 10mm, 8.8, Plt		each	6		
110	WFA12000	Washer, Flat, 12mm, 8.8, Plt		each	2		
120	WFO08000	Washer, Flat, 1/2", 8, Plt		each	4		
130	WFS06002	Washer, Flat, 3/8", L9, Plt		each	10		
140	WLA10000	Washer, Lock, 10mm, 8.8, Plt		each	3		
150	WLA12000	Washer, Lock, 12mm, 8.8, Plt		each	2		
160	WLQ06000	Washer, Lock, 3/8", 8, Plt		each	5		
170	WLQ08000	Washer, Lock, 1/2", 8, Plt		each	4		

Bill of Materials Listing

TransArctic Canada Inc.

12/22/2016

Page 1 of 1

Product Number		Description		Date	Weight	Uof M	Yield
Line	Component	Prod#	Description	Bin	Unit	Qty	
KCB65501			Kit, Compressor, P/S, Alt, TM-65/55, '16		8/10/2016	92.09	0
10	BMN80008		Vibration Isolator, Bar,16.50 x 2 x 1.50		each	2	
20	BMN80025		Bkt, Back, PL, Slide, IC, RE300		each	1	
30	BMZ00043		Bkt, Main, Base Pl, '13		each	1	
40	BTP08653		Bolt, Hex, 1/2-13unc, 6.5", 5, Plt, FT		each	1	
50	BTQ08101		Bolt, Hex, 1/2-20unf, 1.00", 8, Plt		each	4	
60	CSF08076		Capscrew, FH, 1/2-20unf x .75",Alloy,Plt		each	2	
70	KAC65501		Kit, Alternator, TM-65, Curb Side, '13		each	1	
80	KBT65501		Kit, Platform, P/S, TM-55/65, '16		each	1	
90	WFQ08000		Washer, Flat, 1/2", 8, Plt		each	4	
100	WLQ08000		Washer, Lock, 1/2", 8, Plt		each	5	

Bill of Materials Listing

TransArctic Canada Inc.

12/22/2016

Page 1 of 1

Product Number		Description	Bin	Date	Weight	Uof M	Yield
Line	Component Prod#	Description		Unit	Qty		
KAC65501		Kit, Alternator, TM-65, Curb Side, '13		8/10/2016	16.06		0
10	BEL11040	Belt, A gr, 1040mm (41")		each	2		
20	BMC90020	Bkt, Alt, Weldm't, Curb Side, TM65/55, '16		each	1		
30	BMT10011	Bkt, Tenr, Block, Offset, 3mm		each	2		
40	PUL03321	Pulley, ALT, Idler, 3.25"d, 2A		each	1		
50	TRD08060	Threaded, Rod, 1/2-13unc x 6", 5, Plt		each	1		
60	KBA65501	Bag Kit, Fasteners, KAC65501		each	1		

Bill of Materials Listing

TransArctic Canada Inc.

8/11/2016
Page 1 of 1

Product Number		Description	Bin	Date	Weight	Uof M	Yield
Line	Component Prod#	Description		Unit	Qty		
KBA65501		Bag Kit, Fasteners, KAC65501		8/10/2016	1.55		0
10	BTC12035	Bolt, Hex, 12 x 1.75 x 35mm, 10.9,Plt,FT		each	4		
20	BTQ08150	Bolt, Hex, 1/2-13unc, 1.5", 8, Plt		each	1		
30	BTQ08200	Bolt, Hex, 1/2-13unc, 2.0", 8, Plt		each	1		
40	BTQ08653	Bolt, Hex, 1/2-13unc, 6.5", 8, Plt		each	1		
50	NTQ08000	Nut, Hex, 1/2-13unc, 8, Plt		each	7		
60	WFA12000	Washer, Flat, 12mm, 8.8, Plt		each	4		
70	WFQ08000	Washer, Flat, 1/2", 8, Plt		each	4		
80	WLA12000	Washer, Lock, 12mm, 8.8, Plt		each	4		
90	WLQ08000	Washer, Lock, 1/2", 8, Plt		each	5		

Bill of Materials Listing

TransArctic Canada Inc.

8/11/2016
Page 1 of 1

Product Number		Description	Bin	Date	Weight	Uof M	Yield
Line	Component	Prod#		Unit	Qty		
KBT65501				8/10/2016	17.04		0
	10	BMN80031		Bkt, Main, Slide, Assy, 05K, IC, RE300	each	1	
	20	BMZ00039		Bkt, Comp, Rear, TM-65, '12	each	1	
	30	BMZ00040		Bkt, Comp, FRT, TM-65, '12	each	1	
	40	KBZ65501		Bag Kit, Fasteners, KBT65501	each	1	

Bill of Materials Listing

TransArctic Canada Inc.

8/11/2016

Page 1 of 1

Product Number		Description	Bin	Date	Weight	Uof M	Yield
Line	Component Prod#	Description		Unit	Qty		
KBZ65501		Bag Kit, Fasteners, KBT65501		8/10/2016	0.69		0
10	BTC12035	Bolt, Hex, 12 x 1.75 x 35mm, 10.9,Plt,FT		each	4		
20	NTP07000	Nut, Hex, 7/16-14unc, 5, Plt		each	4		
30	WFA12000	Washer, Flat, 12mm, 8.8, Plt		each	4		
40	WFN07000	Washer, Flat, 7/16", 2, Plt		each	4		
50	WLA12000	Washer, Lock, 12mm, 8.8, Plt		each	4		
60	WLQ07000	Washer, Lock, 7/16", 8, Plt		each	4		

Bill of Materials Listing

TransArctic Canada Inc.

8/11/2016
Page 1 of 1

Product Number		Description	Bin	Date	Weight	Uof M	Yield
Line	Component	Prod#		Unit	Qty		
KPC89022				10/15/2013	11.51		0
10	PUL89022			each	1		
20	BTC10050			each	5		
30	WFA10000			each	5		




Kit, Pulley, ISL, 8.9L, 2B/X,'13

Pulley, Crank, ISL, 8.9L, 2B/X, 8", '13

Bolt, Hex, 10 x 1.5 x 50mm, 10.9, Plt

Washer, Flat, 10mm, 8.8, Plt

8 7 6 5 4 3 2 1

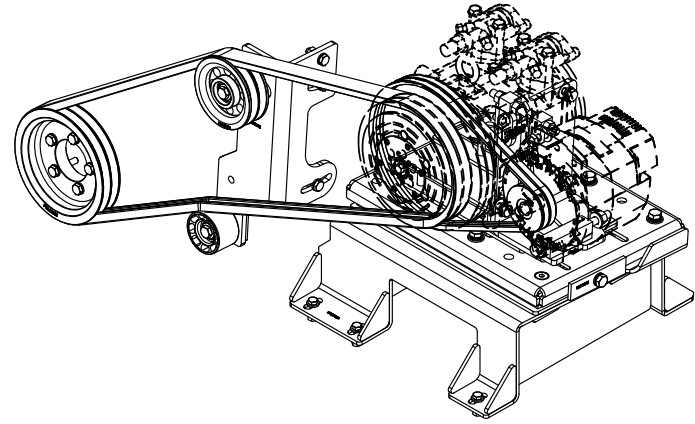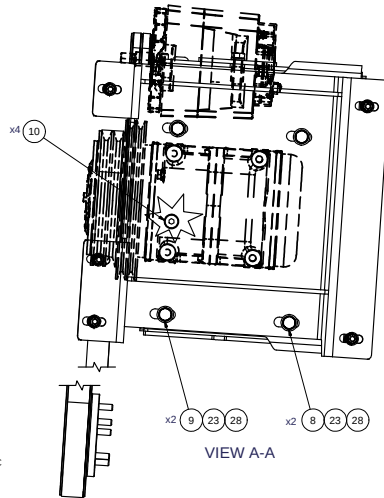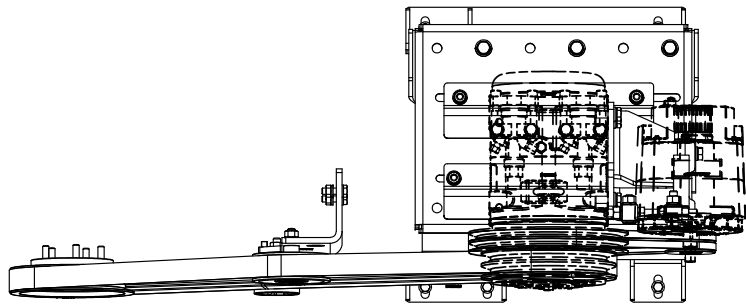

ISOMETRIC VIEW

NOTE:
SHOWING TRANSARCTIC
COMPRESSOR PART#
CMV3844 (TM-55)
CMV38844 (TM-65)
AS REFERENCE.

NOTE:
— SHOWING ALTERNATOR
AS REFERENCE.

NOTES:

- 1) USE SERVICABLE THREADLOCKER ON ALL FASTENERS TO ENGINE COMPONENTS AND TORQUE ALL BOLTS TO S.A.E. SPECIFICATIONS.
2) SEE "TRANSARCTIC A/C COMPRESSOR MOUNT INSTALLATION DISCLAIMER".

28	4	EACH	WLQ08000	WASHER, LOCK, 1/2", 8, PLT
27	5	EACH	WLQ06000	WASHER, LOCK, 3/8", 8, PLT
26	2	EACH	WLA12000	WASHER, LOCK, 12mm, 8.8, PLT
25	3	EACH	WLA10000	WASHER, LOCK, 10mm, 8.8, PLT
24	10	EACH	WFS06002	WASHER, FLAT, 3/8", L9, PLT
23	4	EACH	WFO08000	WASHER, FLAT, 1/2", 8, PLT
22	2	EACH	WFA12000	WASHER, FLAT, 12mm, 8.8, PLT
21	6	EACH	WFA10000	WASHER, FLAT, 10mm, 8.8, PLT
20	2	EACH	SLV17012	SLEEVE, PULLEY, 16.90 x 22.23 mm x12.19
19	1	EACH	SCD25412	SPACER, COL, DRL, 25.4mm x 25.40 x 12.31
18	1	EACH	SCD21912	SPACER, COL, DRL, 21.9mm x 31.80 x12.31
17	1	EACH	PUL80074	PULLEY, IDLER, BACKSIDE, P8, 74D, 46.27W
16	1	EACH	PLA05012	PULLEY, ASSY, IDLER, 8/8X gr, 5" STL, PLT
15	5	EACH	NTQ06000	NUT, HEX, 3/8-16UNC, 8, PLT
14	2	EACH	NTA12000	NUT, HEX, 12 x 1.75, 8.8, PLT
13	3	EACH	NTA10000	NUT, HEX, 10 x 1.5, 8.8, PLT
12	1	EACH	KPC89022	KIT, PULLEY, ISL, 8.9L, 28/X, '13
11	1	EACH	KCB65501	KIT, COMPRESSOR, P/S, ALT, TM-65/55, '16
10	4	EACH	CSF08101	CAPSCREW, FH, 1/2-20UNF x 1", ALLOY, PLT
9	2	EACH	BTQ08151	BOLT, HEX, 1/2-20UNF x 1.50, 8, PLT
8	2	EACH	BTQ08125	BOLT, HEX, 1/2-13UNC x 1.25, 8, PLT
7	5	EACH	BTQ06125	BOLT, HEX, 3/8-16UNC x 1.25, 8, PLT
6	2	EACH	BTC12080	BOLT, HEX, 12 x 1.75 x 80mm, 10.9, PLT
5	3	EACH	BTC10035	BOLT, HEX, 10 x 1.5 x 35mm, 10.9, PLT
4	1	EACH	BMC83129	BKT, WELDMT, MAIN BASE, ISL, HDX, '13
3	1	EACH	BMC83125	BKT, WELDMT, ADAPTER PL, ISL, HDX, '13
2	1	EACH	BMC83123	BKT, MAIN, IDLER, WELDMT, ISL, HDX, '13
1	1	EACH	BEL32388	BELT, BANDED 8 gr, 2388mm (84")

ITEM	QTY	U/M	PART NUMBER	DESCRIPTION
BILL OF MATERIALS				
DRAWN: jrodriquez 8/8/2016				
CHECKED: Vaji Jakovlev 8/8/2016				
DATE: 8/8/2016 BY: James Stewart				
REV: JCN MFG Ron Ingram 8/8/2016				
APPROVED: Date Mason 8/8/2016				
UNSPECIFIED TOLERANCES: (UNT UNL) (FRA) (DEC)				
ONE DECIMAL PLACE (X) .00 (FRA) (DEC)				
TWO DECIMAL PLACE (XX) .00 (FRA) (DEC)				
THREE DECIMAL PLACE (XXX) .000 (FRA) (DEC)				
ANGULAR (XX) (FRA) (DEC)				
THIRD ANGLE PROJECTION				
DRAWING UNIT OF MEASURE: MM (INCH)				
SCALE: 1:4				
DWG NO: KMC96694				
REV: 0				
SHEET 1 OF 1				

8	7	6	5	4	3	2	1
RELEASED TO PROTOTYPE 8/8/2016 JRR							
THIS DRAWING CONTAINS PROPRIETARY CONFIDENTIAL INFORMATION OWNED BY TRANSARCTIC CANADA INC. THE DOCUMENT AND THE INFORMATION IT IS NOT TO BE USED, DISCLOSED OR REPRODUCED WITHOUT EXPRESS WRITTEN PERMISSION OF THE COMPANY.							
UNSPECIFIED TOLERANCES: (UNT UNL) (FRA) (DEC)							
ONE DECIMAL PLACE (X) .00 (FRA) (DEC)							
TWO DECIMAL PLACE (XX) .00 (FRA) (DEC)							
THREE DECIMAL PLACE (XXX) .000 (FRA) (DEC)							
ANGULAR (XX) (FRA) (DEC)							
THIRD ANGLE PROJECTION							
DRAWING UNIT OF MEASURE: MM (INCH)							
SCALE: 1:4							
DWG NO: KMC96694							
REV: 0							
SHEET 1 OF 1							

TRANSARCTIC INC.



MT KIT, ISL, 2013, HDX, TM-55/ 65, 24v, '16

DWG NO: KMC96694


SHEET 1 OF 1

TOP VIEW



PARTS REMOVED FOR CLARITY.

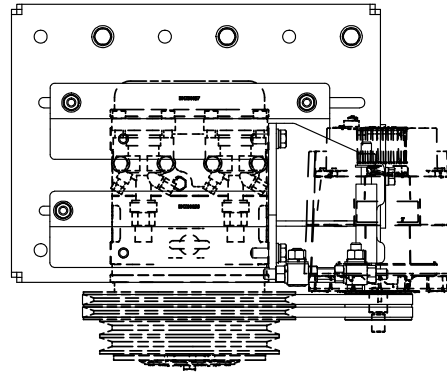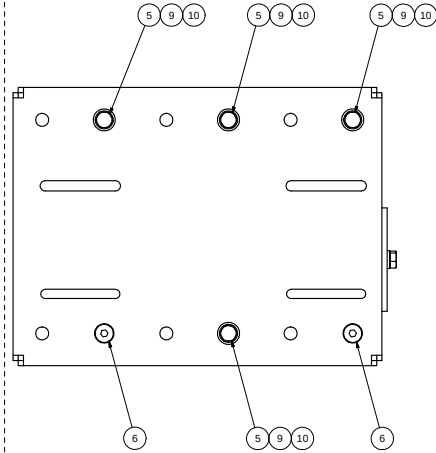

NOTE:
SHOWING COMPRESSOR
VALE OF 721455BY
AS REFERENCE.

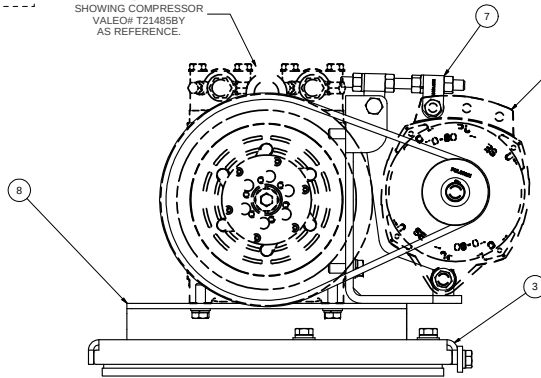

NOTE:
SHOWING ALTERNATOR
AS REFERENCE.

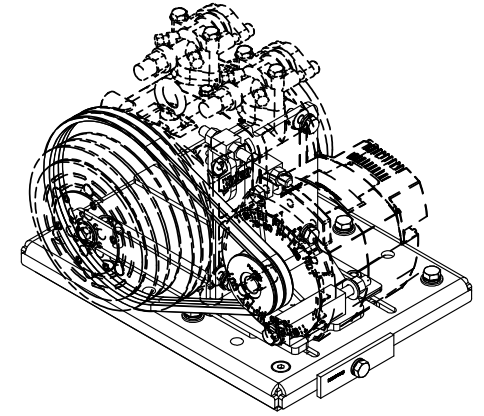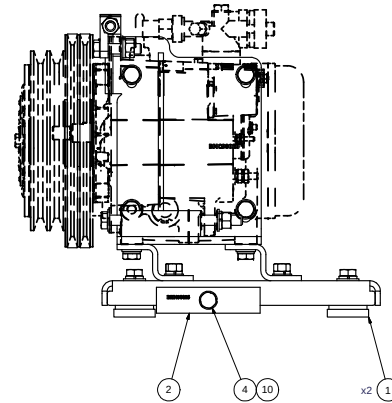

ISOMETRIC VIEW

NOTES:

- 1) USE SERVICABLE THREADLOCKER ON ALL FASTENERS TO ENGINE COMPONENTS AND TORQUE **ALL** BOLTS TO S.A.E. SPECIFICATIONS.
- 2) SEE "TRANSARCTIC A/C COMPRESSOR MOUNT INSTALLATION DISCLAIMER".
- 3) WEIGHT: 68.75 LBS.

ITEM	QTY	U/M	PART NUMBER	DESCRIPTION
10	5	EACH	WFO08000	WASHER, LOCK, 1/2", 8, PLT
9	4	EACH	WFO08000	WASHER, FLAT, 1/2", 8, PLT
8	1	EACH	KBT65501	KIT, PLATFORM, P/S, TM-55/65, '16
7	1	EACH	KAC65501	KIT, ALTERNATOR, TM-65, CURB SIDE, '13
6	2	EACH	CSF08076	CAPSCREW, FH, 1/2-20UNF x .75", ALLOY, PLT
5	4	EACH	BTQ08101	BOLT, HEX, 1/2-20UNF x 1.00, 5, PLT
4	1	EACH	BTP08653	BOLT, HEX, 1/2-13UNC x 6.50, 5, PLT, FT
3	1	EACH	BMZ00043	BKT, MAIN, BASE PL, '13
2	1	EACH	BMN00025	BKT, BACK, PL, SLIDE, IC, RE300
1	2	EACH	BMN00008	VIBRATION ISOLATOR, BAR, 16.50 x 2 x 1.50

BILL OF MATERIALS

BROWN	8/3/2016	
vjakowlew		
CHECKED	8/3/2016	
Jose Rodriguez		
REV	ECN	DESCRIPTION
1		RELEASED TO PRODUCTION
2		DATE: 8/3/2016
3		BY: JRR
4		QA
5		James Stewart
6		8/3/2016
7		MF3
8		James Stewart
9		8/3/2016
10		APPROVED
11		Date Mason
12		8/3/2016
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
51		
52		
53		
54		
55		
56		
57		
58		
59		
60		
61		
62		
63		
64		
65		
66		
67		
68		
69		
70		
71		
72		
73		
74		
75		
76		
77		
78		
79		
80		
81		
82		
83		
84		
85		
86		
87		
88		
89		
90		
91		
92		
93		
94		
95		
96		
97		
98		
99		
100		

TRANSARCTIC INC.

KIT, COMPRESSOR, P/S, ALT,
TM-65/55, '16

SIZE D DWG NO KCB65501 REV 0



0	RELEASED TO PRODUCTION			8/3/2016	3R
REV	ECN	DESCRIPTION		DATE	BY

THIS DRAWING CONTAINS PROPRIETARY CONFIDENTIAL INFORMATION OWNED BY TRANSACTIC CANADA INC. THE DOCUMENT AND THE INFORMATION IT IT ARE NOT TO BE USED, DISCLOSED OR REPRODUCED WITHOUT EXPRESS WRITTEN PERMISSION OF THE COMPANY.

UNSPECIFIED TOLERANCES:		S&T (DIM'S)
ONE DECIMAL PLACE (X)	.00	(X)
TWO DECIMAL PLACE (X)	.005	(X)
THREE DECIMAL PLACE (X)	.010	(X)
FRACTIONAL (X) 1/32"	.0001	(X)
	.0005	(X)
	.001	(X)




THIRD ANGLE PROJECTION

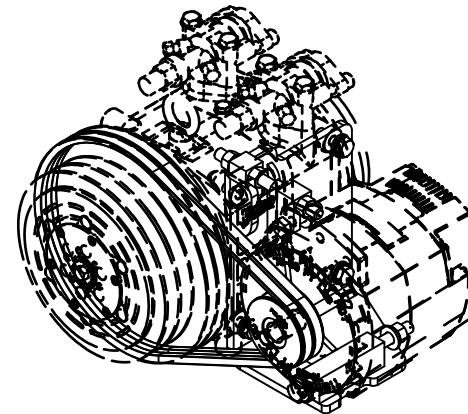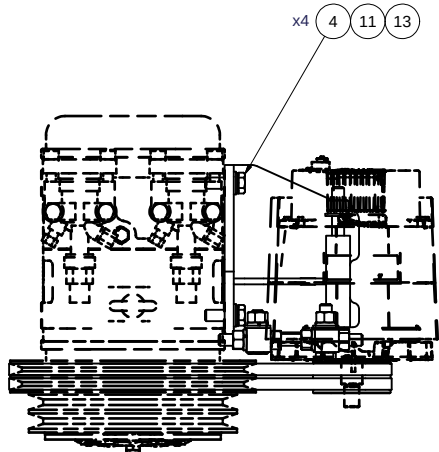


ISOMETRIC VIEW

NOTE:
SHOWING COMPRESSOR
VALEO# T21485BY
AS REFERENCE.

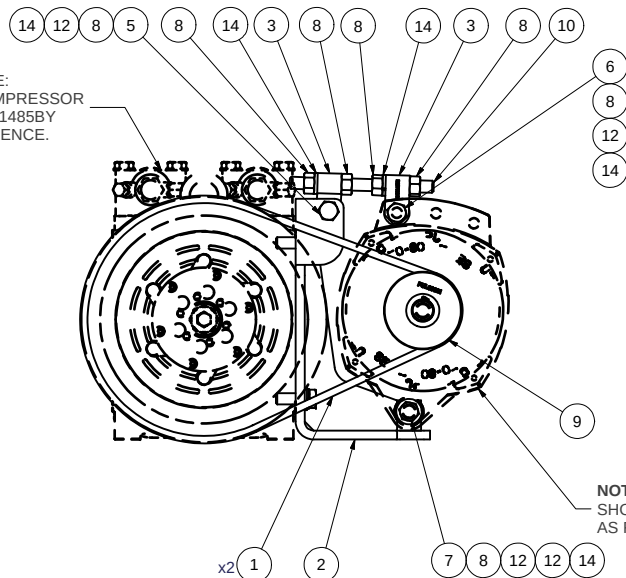

NOTE:
SHOWING ALTERNATOR
AS REFERENCE.



NOTES:



- 1) USE SERVICABLE THREADLOCKER ON ALL FASTENERS TO ENGINE COMPONENTS AND TORQUE **ALL** BOLTS TO S.A.E. SPECIFICATIONS.
- 2) SEE "TRANSARCTIC A/C COMPRESSOR MOUNT INSTALLATION DISCLAIMER".
- 3) WEIGHT: 18.11 LB

14	5	EACH	WLQ08000	WASHER, LOCK, 1/2", 8, PLT
13	4	EACH	WLA12000	WASHER, LOCK, 12mm, 8.8, PLT
12	4	EACH	WFO08000	WASHER, FLAT, 1/2", 8, PLT
11	4	EACH	WFA12000	WASHER, FLAT, 12mm, 8.8, PLT
10	1	EACH	TRD08060	THREADED, ROD, 1/2-13UNC x 6", 5 PLT
9	1	EACH	PUL03321	PULLEY, ALT, IDLER, 3.25"o, 2A
8	7	EACH	NTQ08000	NUT, HEX, 1/2-13UNC, 8, PLT
7	1	EACH	BTQ08653	BOLT, HEX, 1/2-13UNC x 6.50, 8, PLT
6	1	EACH	BTQ08200	BOLT, HEX, 1/2-13UNC x 2.00, 8, PLT
5	1	EACH	BTQ08150	BOLT, HEX, 1/2-13UNC x 1.50, 8, PLT
4	4	EACH	BTC12035	BOLT, HEX, 12 x 1.75 x 35mm, 10.9, PLT
3	2	EACH	BMT10011	BKT, TENR, BLOCK, OFFSET, 3mm
2	1	EACH	BMC90020	BKT, ALT, WELDM'T, CURB SIDE, TM-65/55, '16
1	2	EACH	BEL11118	BELT, A gr, 1040mm (41")
ITEM	QTY	U/M	PART NUMBER	DESCRIPTION



BILL OF MATERIALS

DRAWN vjakowlew	8/3/2016	TRANSARCTIC INC.
CHECKED Jose Rodriguez	8/3/2015	
QA James Stewart	8/3/2016	TITLE KIT, ALTERNATOR, TM-65, CURB SIDE, '13
MFG James Stewart	8/3/2015	
APPROVED Dale Mason	8/3/2015	SIZE C
DRAWING UNIT OF MEASURE:	MM [INCH]	SCALE 1:4
		DWG NO KAC65501
		REV 0
		SHEET 1 OF 1

0	RELEASED TO PRODUCTION	8/3/2016	JRR
REV	ECN	DESCRIPTION	DATE
THIS DRAWING CONTAINS PROPRIETARY CONFIDENTIAL INFORMATION OWNED BY TRANSARCTIC CANADA INC.. THE DOCUMENT AND THE INFORMATION IN IT ARE NOT TO BE USED, DISCLOSED OR REPRODUCED WITHOUT EXPRESS WRITTEN PERMISSION OF THE COMPANY.			
UNSPECIFIED TOLERANCES: [ALT. DIM.]			
ONE DECIMAL PLACE (.X)	.50	[.020]	
TWO DECIMAL PLACE (.XX)	.25	[.010]	
THREE DECIMAL PLACE (.XXX)	.10	[.005]	
FRACTIONAL +/- 1/32"	ANGULAR +/- .50°		
THIRD ANGLE PROJECTION			

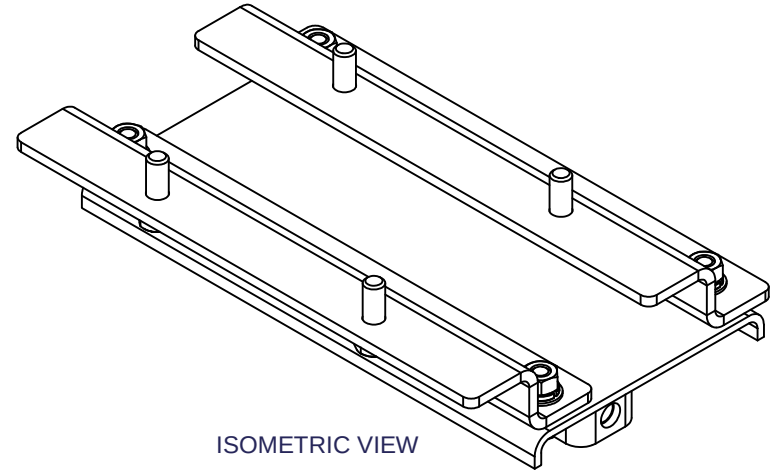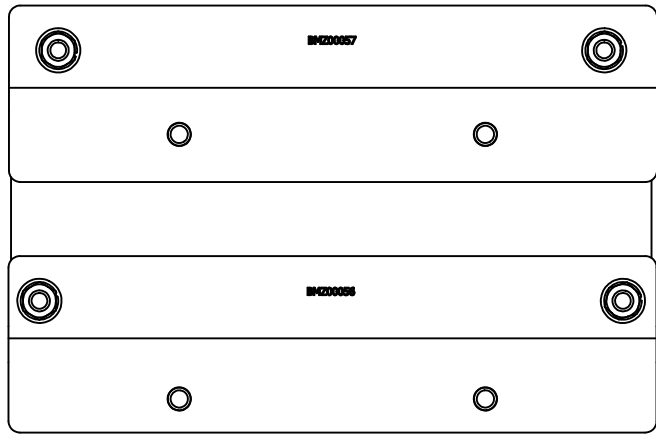

ISOMETRIC VIEW

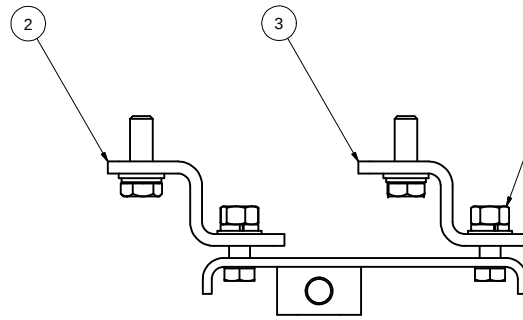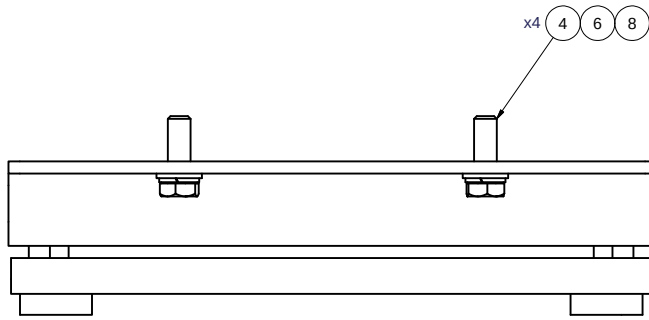


x4 5 7 9

NOTES:

- 1) USE SERVICABLE THREADLOCKER ON ALL FASTENERS TO ENGINE COMPONENTS AND TORQUE **ALL** BOLTS TO S.A.E. SPECIFICATIONS.
- 2) SEE "TRANSARCTIC A/C COMPRESSOR MOUNT INSTALLATION DISCLAIMER".
- 3) WEIGHT: 16.47 LBS.

0	RELEASED TO PRODUCTION.	8/8/2016	JR	
REV	ECN	DESCRIPTION	DATE	BY
THIS DRAWING CONTAINS PROPRIETARY CONFIDENTIAL INFORMATION OWNED BY TRANSARCTIC CANADA INC.. THE DOCUMENT AND THE INFORMATION IN IT ARE NOT TO BE USED, DISCLOSED OR REPRODUCED WITHOUT EXPRESS WRITTEN PERMISSION OF THE COMPANY.				
UNSPECIFIED TOLERANCES: (ALT. DIM.)				
ONE DECIMAL PLACE (X)	.50	(.020)		
TWO DECIMAL PLACE (XX)	.25	(.010)		
THREE DECIMAL PLACE (XXX)	.10	(.005)		
FRACTIONAL +/- 1/32"	ANGULAR +/- .50°			
THIRD ANGLE PROJECTION				

9	4	EACH	WLQ07000	WASHER, LOCK, 7/16", 8, PLT
8	4	EACH	WLA12000	WASHER, LOCK, 12mm, 8.8, PLT
7	4	EACH	WFN07000	WASHER, FLAT, 7/16", 2, PLT
6	4	EACH	WFA12000	WASHER, FLAT, 12mm, 8.8, PLT
5	4	EACH	NTP07000	NUT, HEX, 7/16-14UNC, 5, PLT
4	4	EACH	BTC12035	BOLT, HEX, 12 x 1.75 x 35mm, 10.9, PLT
3	1	EACH	BMZ00057	BKT, COMP, REAR, Z, TM-65/55, '13
2	1	EACH	BMZ00056	BKT, COMP, FRT, Z, TM-65/55, '13
1	1	EACH	BMN80031	BKT, MAIN, SLIDE, ASSY, 05K, IC, RE300
ITEM	QTY	U/M	PART NUMBER	DESCRIPTION
BILL OF MATERIALS				
DRAWN		8/8/2016		
CHECKED		8/8/2016		
QA		8/8/2016		
James Stewart		8/8/2016		
MFG		8/8/2016	KIT, PLATFORM, P/S, TM-55/65, '16	
James Stewart		8/8/2016		
APPROVED		8/8/2016		
Dale Mason		8/8/2016		
DRAWING UNIT OF MEASURE:		MM [INCH]	SCALE	1:2
SIZE		C	DWG NO	KBT65501
REV		0	SHEET	1 OF 1

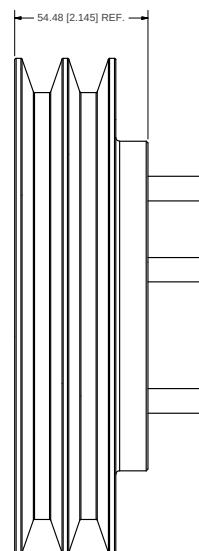



ITEM	QTY	U/M	PART NUMBER	DESCRIPTION
BILL OF MATERIALS				



TRANSARCTIC INC.


		D	KPC89022	0
DRAWING UNIT OF MEASURE:	MM [INCH]	SCALE	1:1	SHEET 1 OF 1





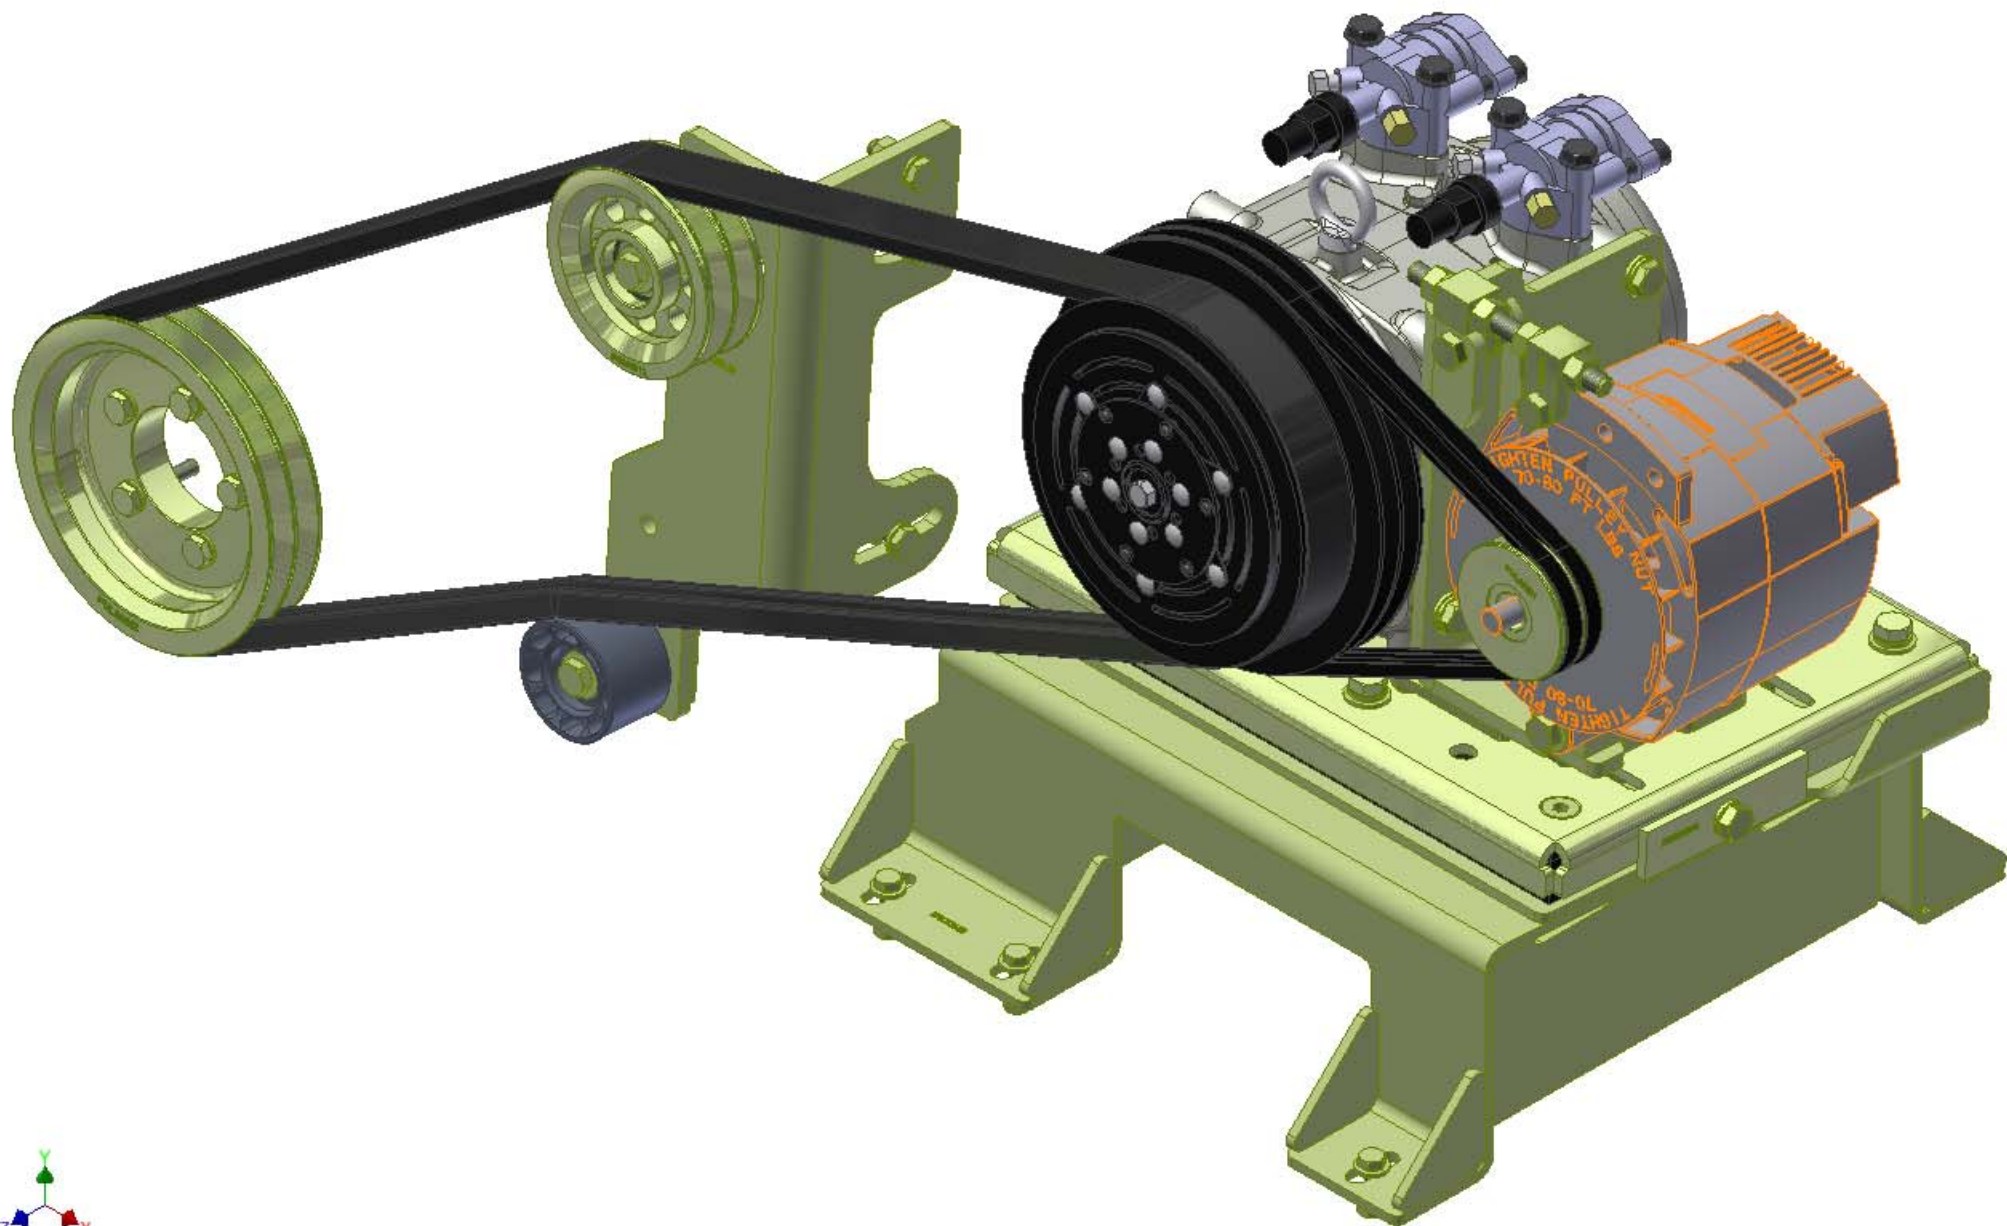

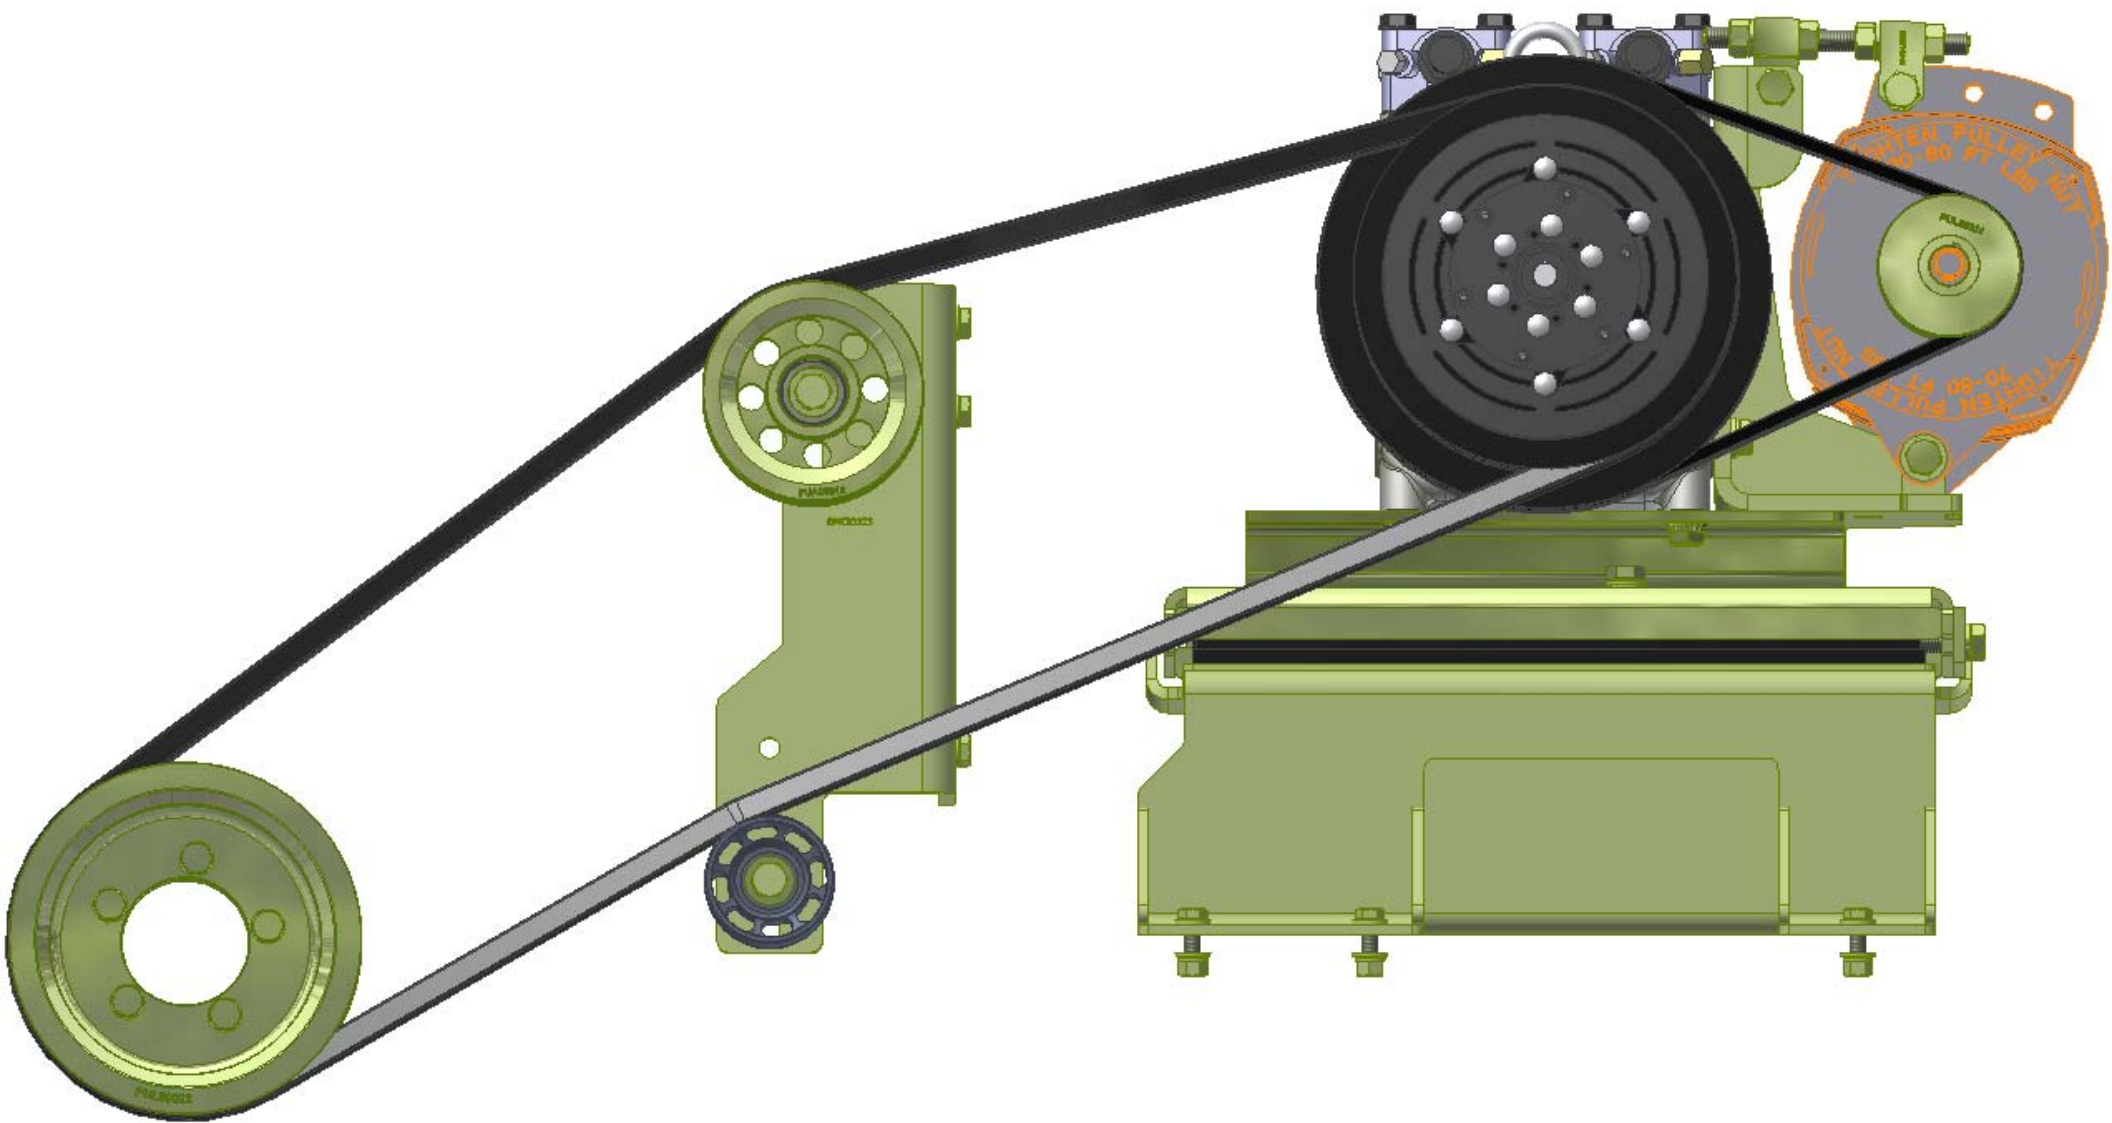

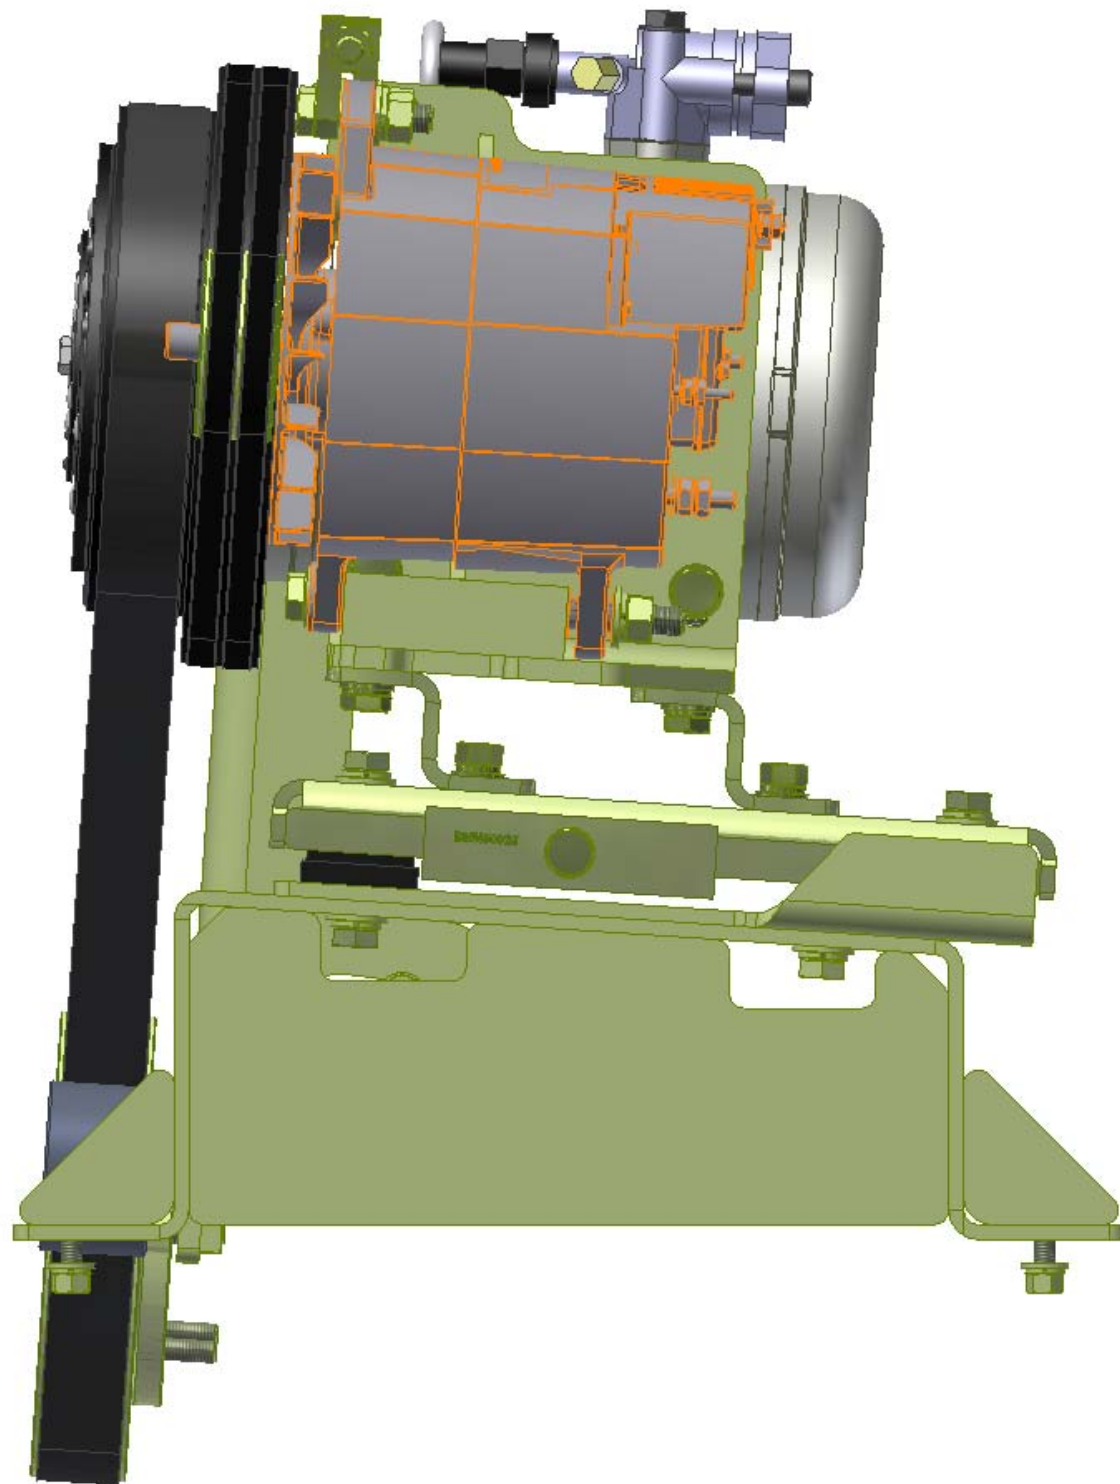

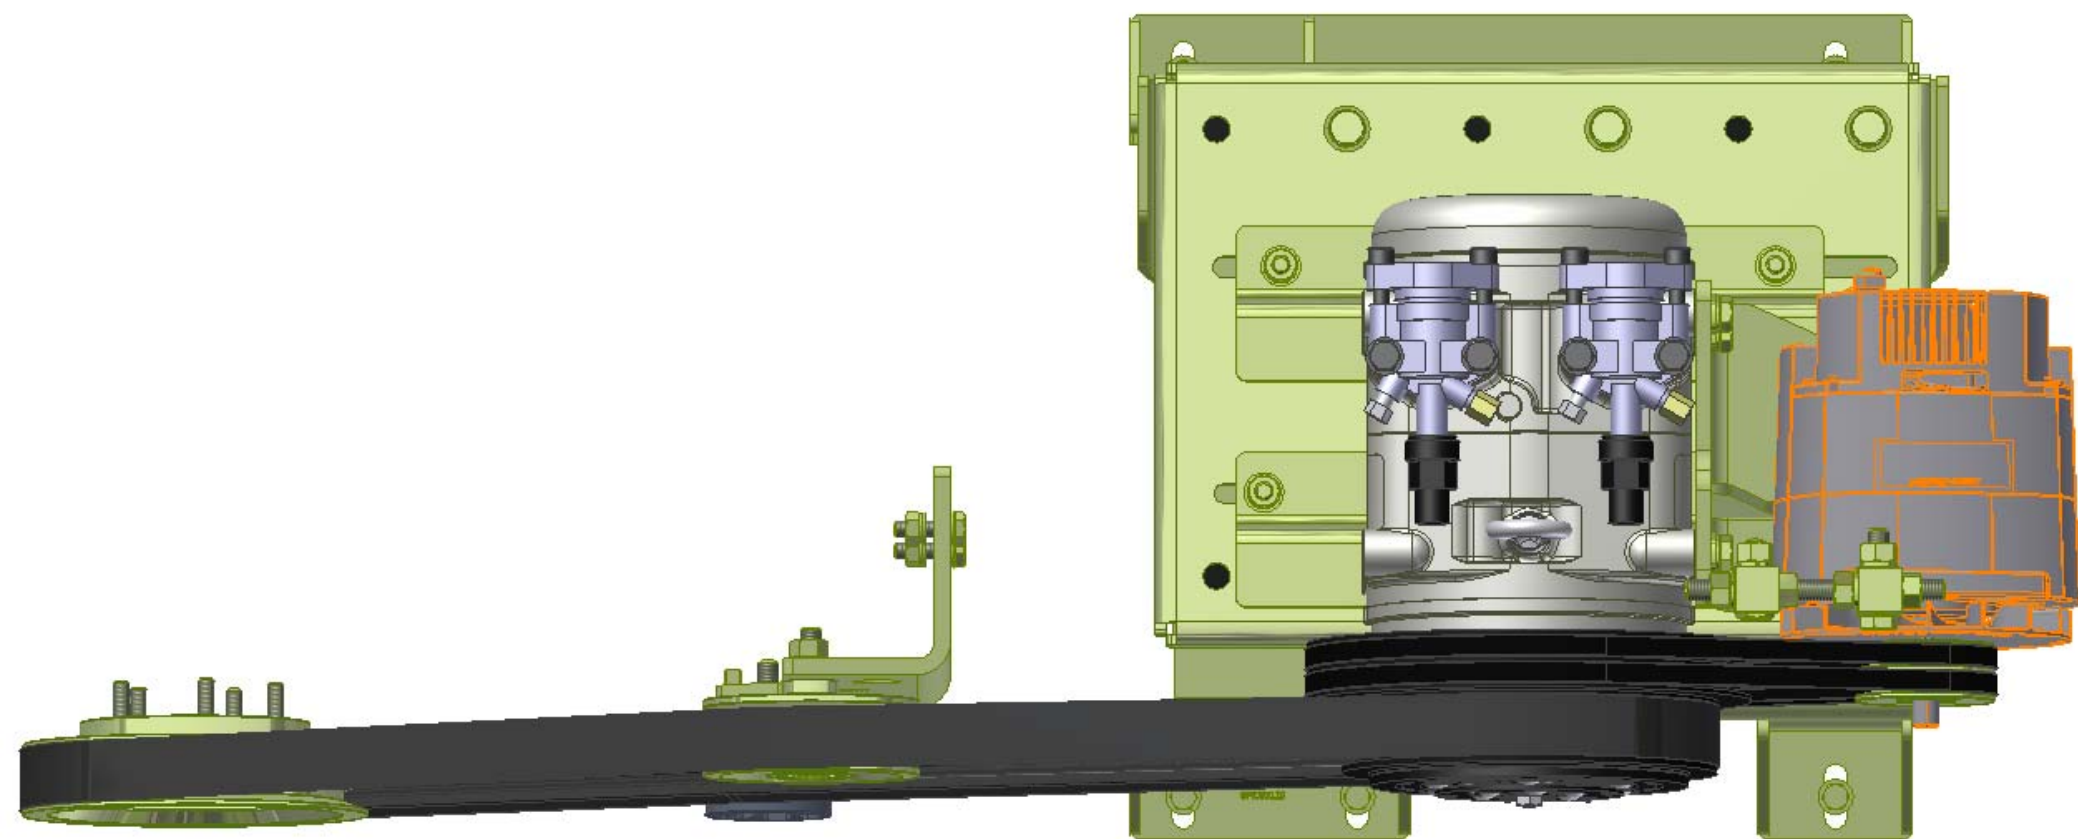

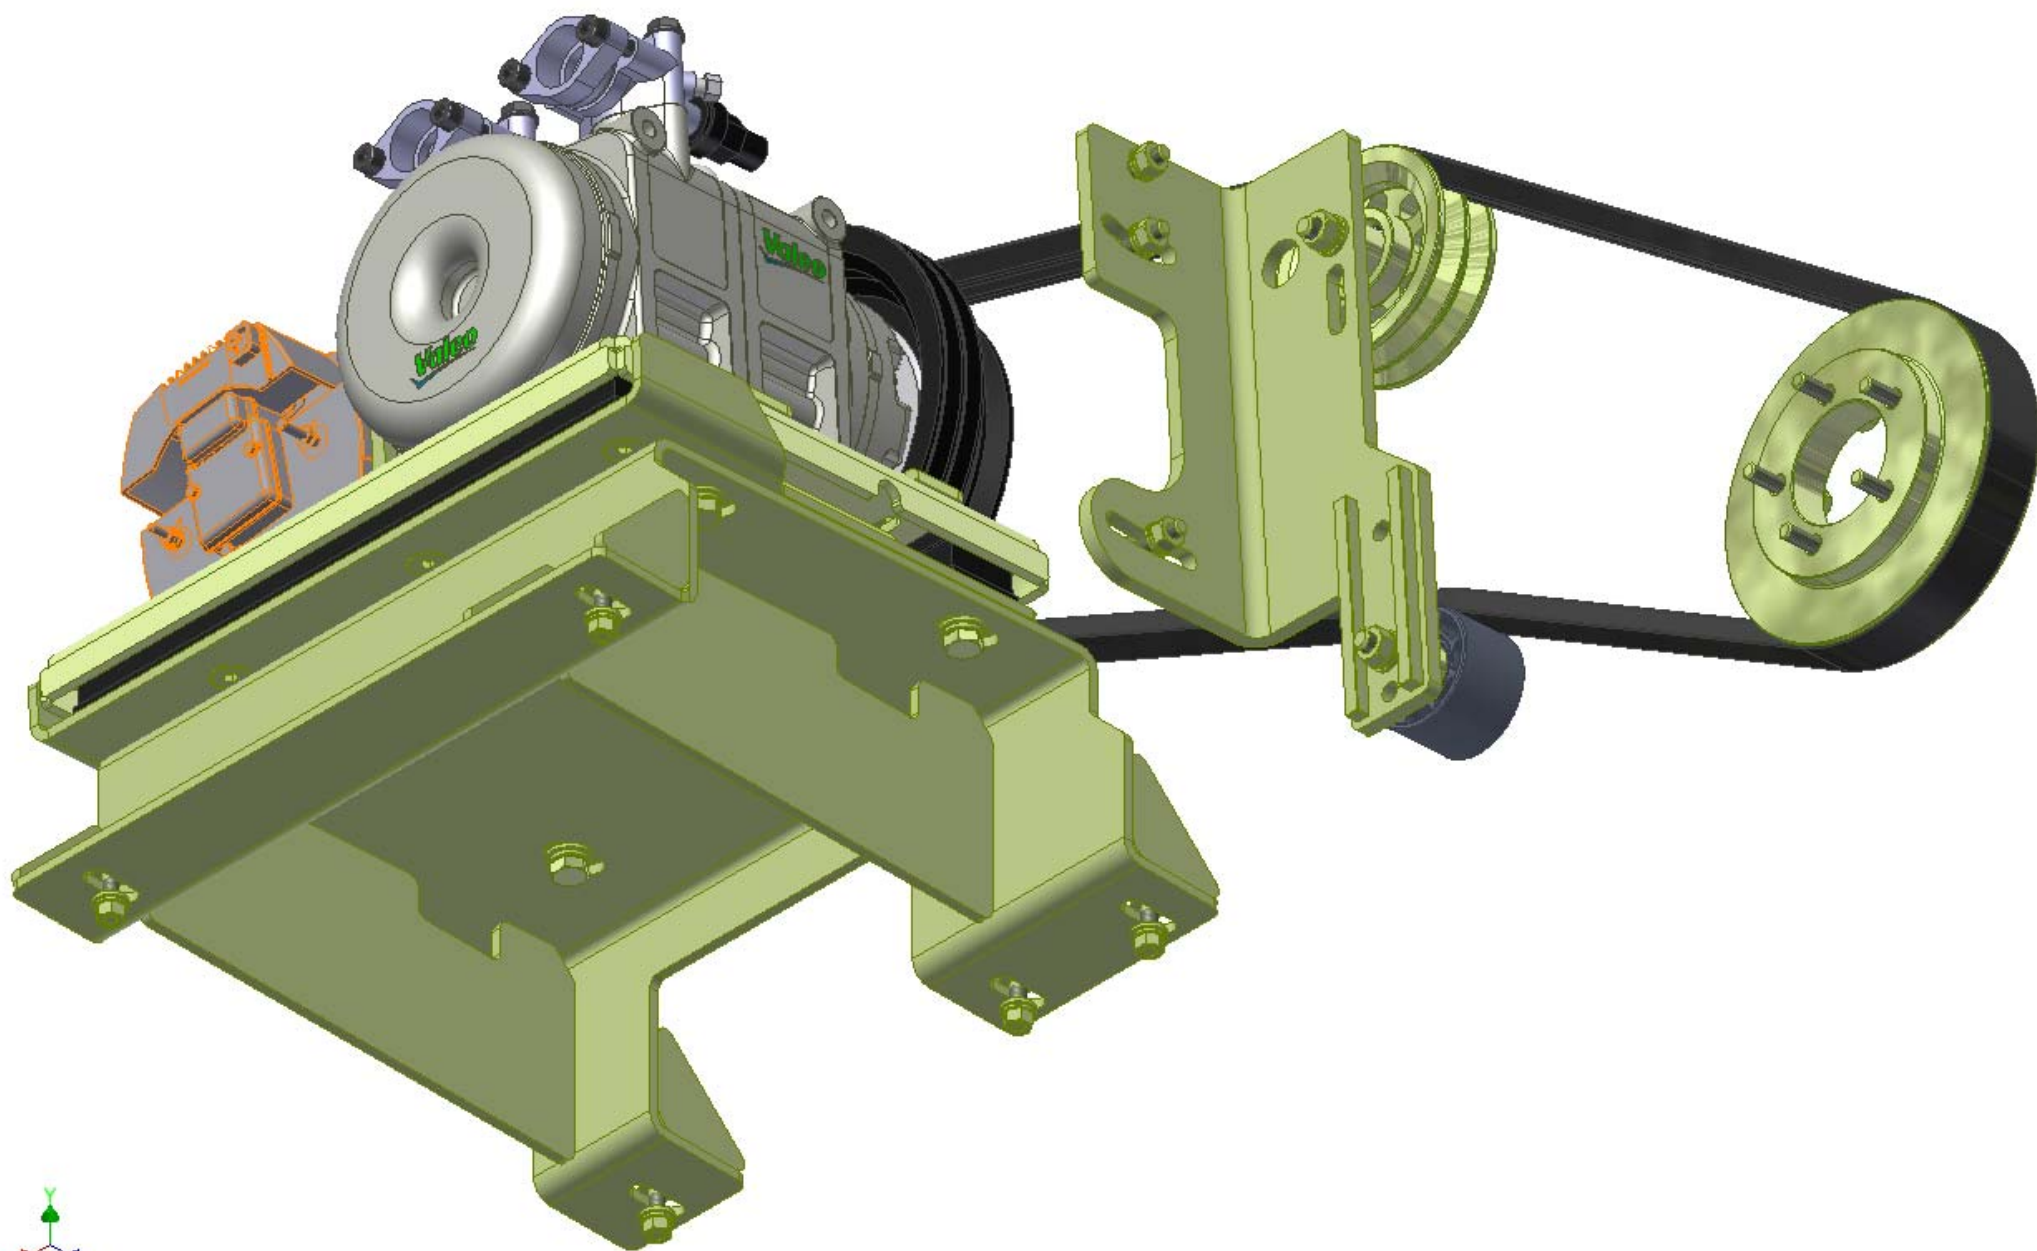

TransArctic A/C Compressor Mount Installation Disclaimer

All compressor mounts should be installed by qualified and trained personnel using proper tools and equipment in safe working conditions following industry standard guidelines for motor vehicle service and repair.

The installer of any compressor mount purchased from TransArctic must undertake all responsibility of issues arising from that compressor bracket being installed on any vehicle. As well as insure that a **proper and sufficient ground** is established between the compressors' clutches and the vehicle's engine. Mount functionality, operation and durability can all be compromised by an incompetent installation.

Due to the many different situations, parameters and application criteria, which are beyond the compressor mount manufacturer's control, TransArctic does not warrant design, durability, or operational functionality of any compressor mount improperly installed by another party.

With no implied guarantees it is the mount installer's strict responsibility to determine safety and functionality, of the compressor mount, at the time of installation.

Please contact TransArctic with any issue arising from installation so we may better improve the product. If you have any reservations about the compressor mount integrity contact TransArctic immediately at 1-877-COLD-AIR.

Mark OEM tensioner location

Install Kit

Check for Interferences

Check to ensure that the proper OEM tensioner orientation is maintained

Run engine with A/C system engaged for at least 10 minutes to run in belt

Check OEM tensioner orientation and adjust as required

Responsabilidad limitada de TransArctic en la instalación del soporte del compresor

Todos los soportes de los compresores deben ser instalados por personas calificadas y entrenadas, usando para ello los equipos y herramientas necesarios para esta labor en buenas condiciones y según las normas y guías para el servicio y/o reparación de motores de vehículos.

El instalador de los soportes comprados en TransArctic asume toda la responsabilidad de cualquier problema que surga en el soporte del compresor al vehículo; de igual manera es responsable que el cable a tierra sea conectado entre el embrague del compresor y el motor del vehículo.

Se advierte que el buen funcionamiento y la durabilidad del soporte pueden ser comprometidos por defectos en su instalación.

Debido a las diversas situaciones que se puedan presentar fuera del control del fabricante, TransArctic no garantiza el diseño, la durabilidad o el correcto funcionamiento de cualquier equipo inapropiadamente instalado por terceros.

Esta sobreentendido que el Instalador del montaje del compresor es estrictamente responsable de la seguridad y funcionamiento del equipo en el momento de la instalación.

Si tuviera algún problema o duda acerca de la instalación del soporte del compresor pongase en contacto inmediatamente con TransArctic al teléfono 1-877-COLD-AIR de modo que podamos mejorar nuestro producto.

Note la ubicación del medidor de tensión OEM

Instale el equipo

Controlar si hay interferencias.

Asegurese que el medidor de tensión mantenga la orientación justa.

Encienda el motor por lo menos 10 minutos con el sistema A/C enganchado para que la correa corra

Controle la orientación justa del medidor de tensión y ajuste a las condiciones requeridas del fabricante