
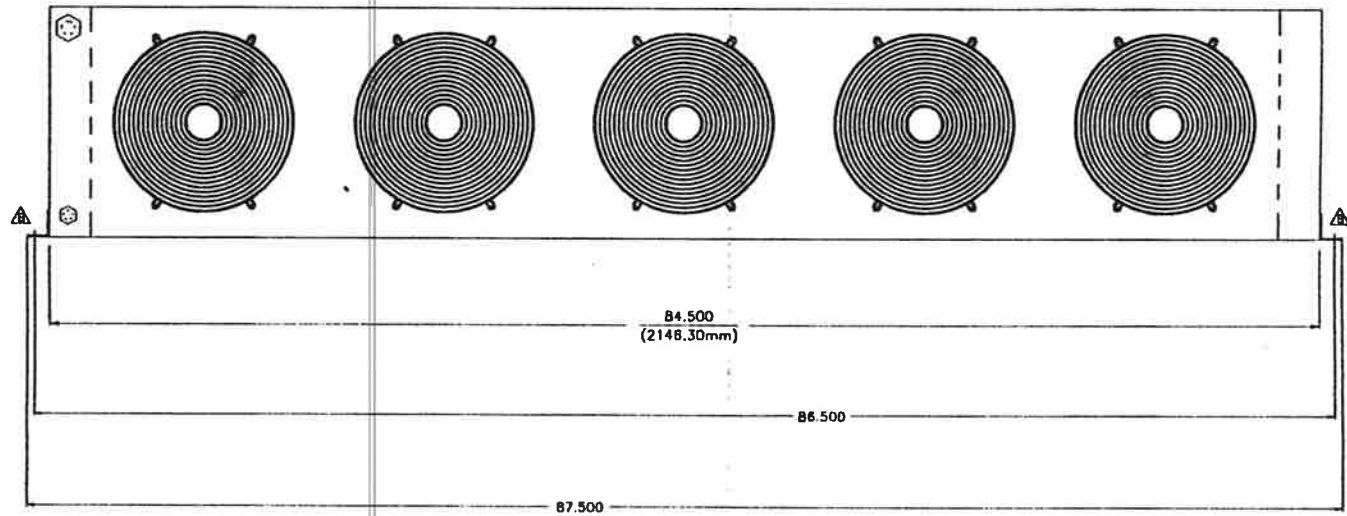


SPECIFICATIONS

CAPACITY - 162,000 BTU/HR (40,826 KCAL) @ 40° F (22.2° C) ΔT
 - 141,750 BTU/HR (35,723 KCAL) @ 35° F (19.4° C) ΔT
 - 121,500 BTU/HR (30,619 KCAL) @ 30° F (16.6° C) ΔT
 AIR FLOW - 6,000 CFM (10,195 M³/HR)
 AMPERAGE - 41.1 AMPS @ 24 VDC
 WEIGHT - 150 LBS (68 KG)

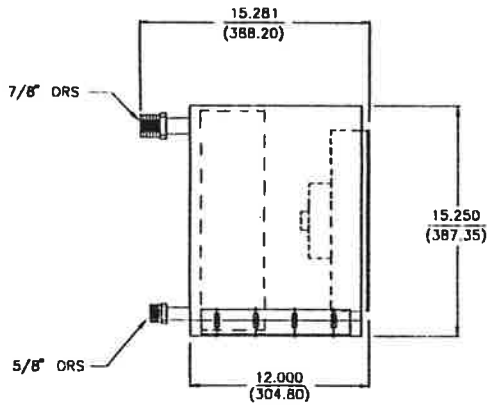

NO DEVIATION FROM THE CONSTRUCTION DEFINED BY AN APPROVED SAMPLE OR DETAILED SPECIFICATION (ON FILE IN CARRIER-TRANSICOLD DIVISION ENGINEERING DEPARTMENT) WILL BE MADE WITHOUT APPROVAL FROM CARRIER-TRANSICOLD DIVISION PURCHASING DEPARTMENT.

CODE NO.

UNITED TECHNOLOGIES
 Carrier Transicold
 Carrier Corporation
 P.O. Box 4005
 Syracuse, New York 13221

THIRD ANGLE PROJECTION 	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON: 0.00 DEC 0.000 DEC 0.000 DEC AND 0.000 0.000 0.000 ± 0.015 ± 0.015 ± 0.015	THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN IS PROPERTY OF CARRIER CORPORATION AND SHALL NOT BE USED OR DISCLOSED TO OTHERS IN WHOLE OR IN PART WITHOUT THE WRITTEN AUTHORIZATION OF CARRIER CORPORATION.
	MATERIAL PE APPLIED FINISH PART (S) MUST COMPLY WITH ENGR REQUIREMENT (S). FINISH DR YDL G-4B	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON: 0.00 DEC 0.000 DEC 0.000 DEC AND 0.000 0.000 0.000 ± 0.015 ± 0.015 ± 0.015
TITLE COND. OUTLINE CM-2	DRAWING NO. 080-041	REV B
DATE 8-8-92	SCALE 1 = 4	NEXT DRAWING DATE

REV	SYMBOL	DESCRIPTION	DATE	BY	CHK'D	APP'D	AUTH NO.
B		ADDED MOUNTING FEET	10-12-92	JMJ			2880
A	ECN 11317		6/93	BC			
SYM		REVISION RECORD	DATE	BY	CHK'D	APP'D	AUTH NO.